




OLIGHT Perun 2 Mini Flashlight User Manual

[Home](#) » [OLIGHT](#) » OLIGHT Perun 2 Mini Flashlight User Manual 



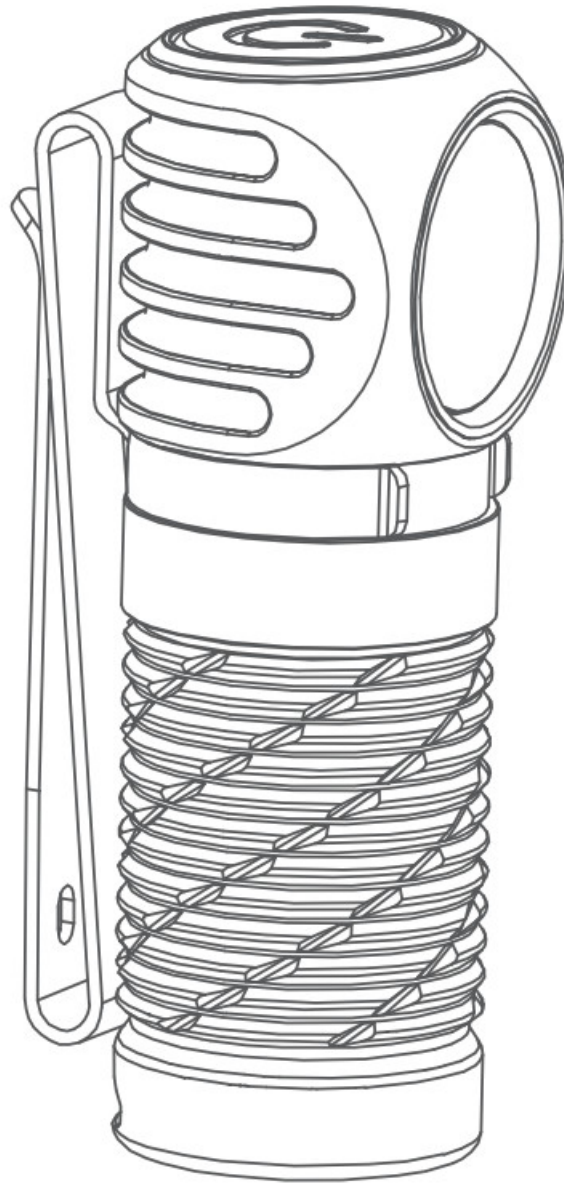


Contents

- [1 Perun 2 Mini Flashlight](#)
- [2 IN THE BOX](#)
- [3 Product specification](#)
- [4 Operating instructions](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)
- [6 Related Posts](#)


Perun 2 Mini Flashlight

A compact, high-brightness rechargeable right-angle flashlight that combines both white and red light.


IN THE BOX

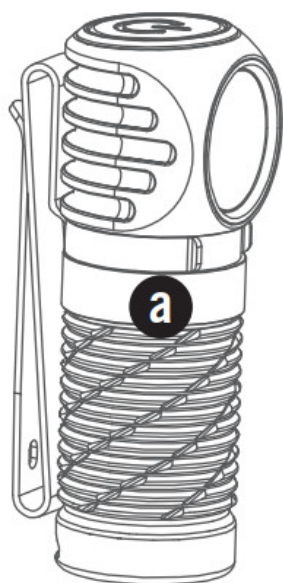

Flashlight



Headlamp Base



Headband



USB Magnetic Charging Cable

Multi-language dictionary

Moonlight	Low	Medium	High	Turbo	Redlight	Press	Double press	Press and hold	Blink once	Blink twice
-----------	-----	--------	------	-------	----------	-------	--------------	----------------	------------	-------------

Product specification

Table 1: Flashlight

COOL WHITE CCT: 5700~6700K CRI:70

NEUTRAL WHITE CCT: 4000~5000K CRI:70

TURBO	1,100 lumens	   
HIGH	250 lumens	 
MEDIUM	60 lumens	 
LOW	15 lumens	 
MOONLIGHT	2 lumens	 
REDLIGHT	40 lumens	 



5950cd



150m



IPX8



1.5m



Working temperature
0-40°C



(L)64*(D)22mm
(L)2.52*(D)0.87in



ORB-16C06-6C
650mAh3.6V



54g/1.9oz
(Including Battery)

* Above data are tested per ANSI/NEMA FL 1-2009 standard in Olight's labs for reference. The tests are performed indoors under a room temperature of 25 degrees celsius with windless conditions. The runtime may vary depending on the external temperature and ventilation conditions, and these biases may affect the results of testing.


Table 2:
USB Magnetic Charging Cable

Cable length	0.5m
Input	USB-A 5V 1A
Output	CC&CV 4.2V±0.05V 1.0A
Time to fully charge	About 70 mins

Operating instructions

2.1 Remove the insulating film

Figure 1

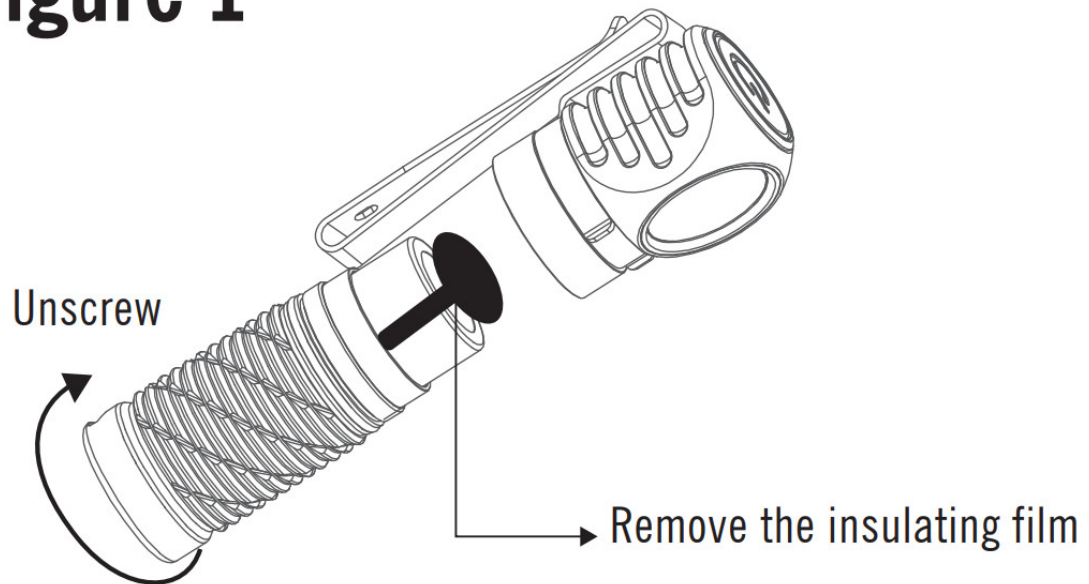

- 2.2 Charging, see Figure 2;
- 2.3 ON/OFF, see Figure 3;
- 2.4 Lockout / Unlock, see Figure 4;

Figure 2

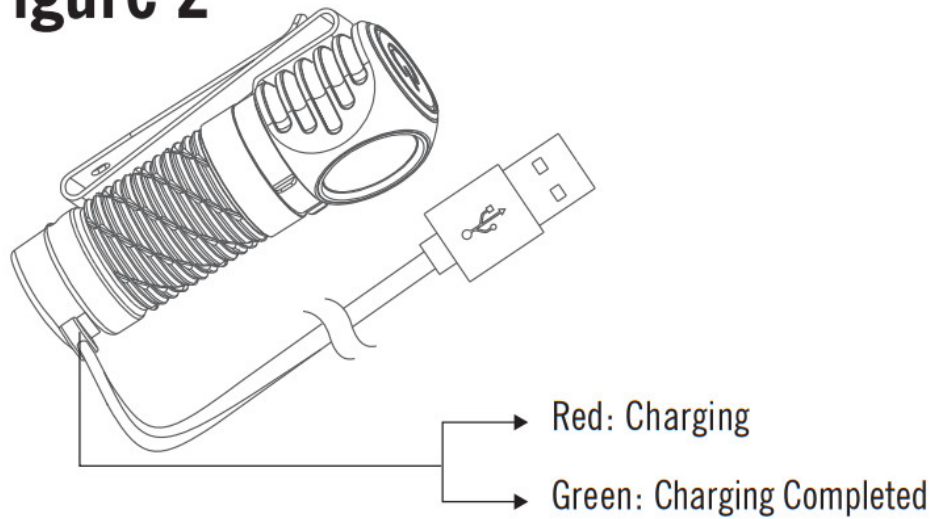


Figure 3


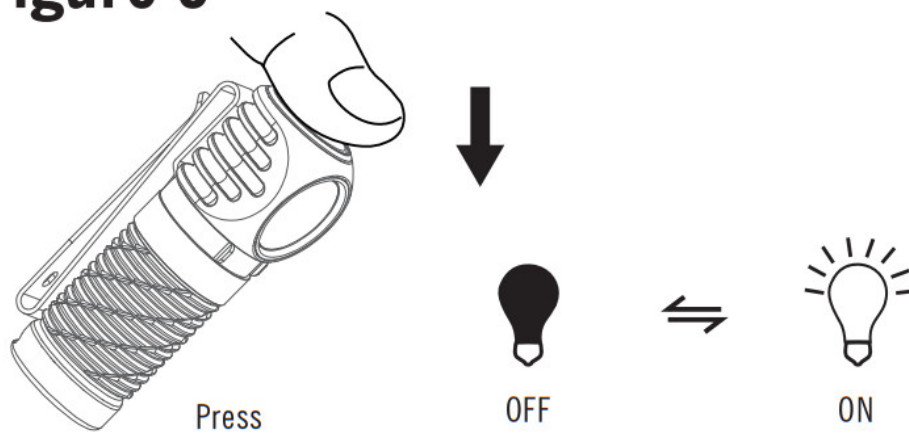


Figure 4

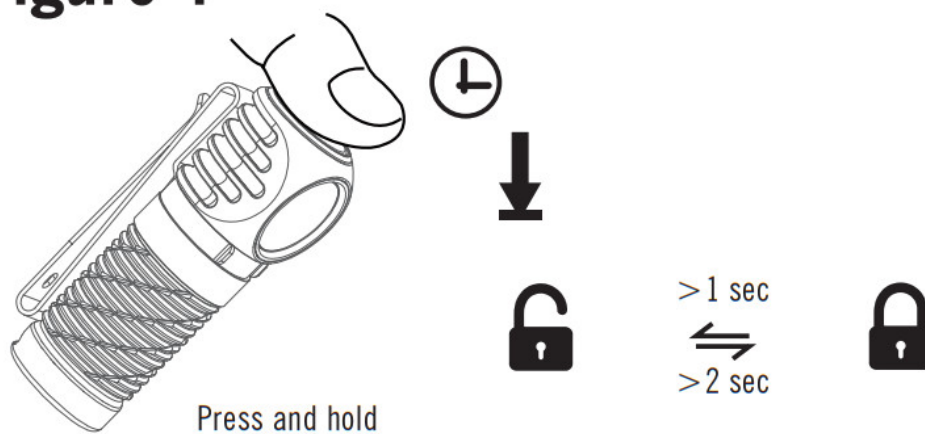

- 2.5 Moonlight, see Figure 5;
- 2.6 TURBO, see Figure 6;
- 2.7 Change brightness level, see Figure 7;

Figure 5

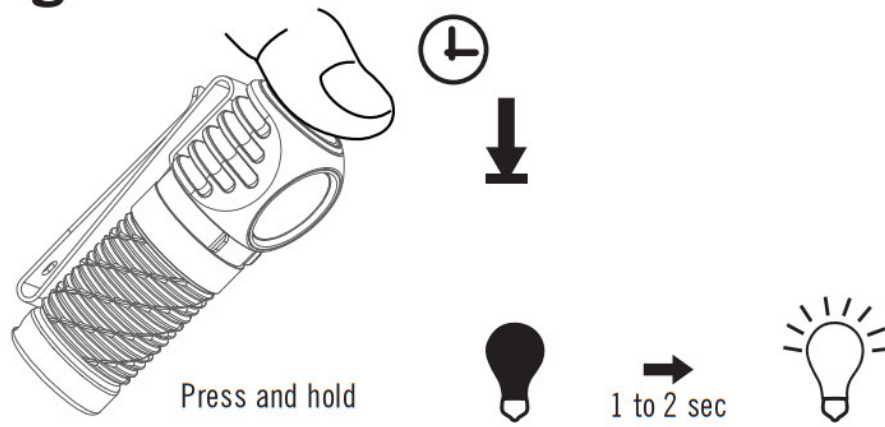


Figure 6


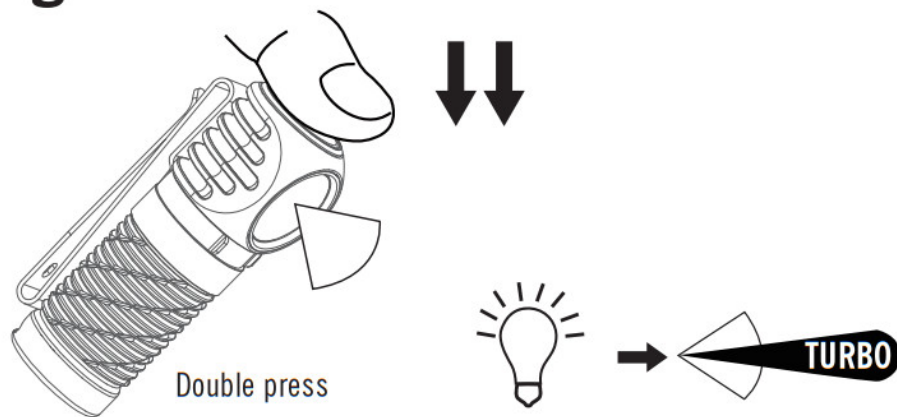


Figure 7

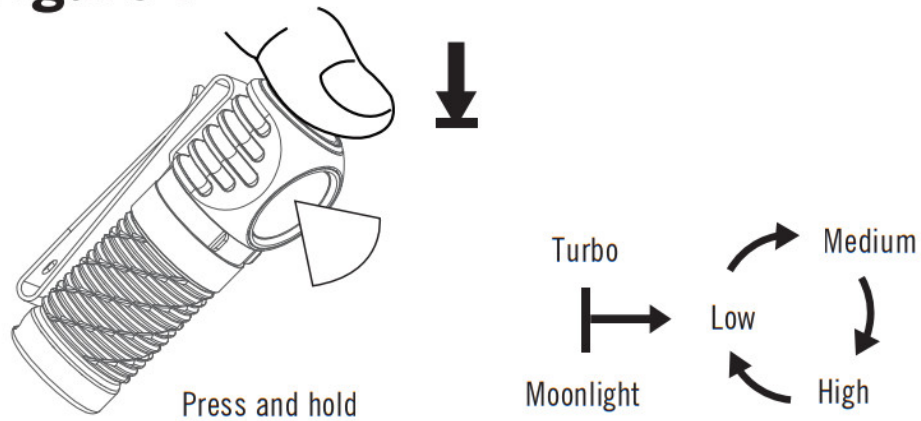

2.8 Redlight, see Figure 8-1; SOS mode, see Figure 8-2;
2.9 Set timer, see Figure 9;

Figure 8-1

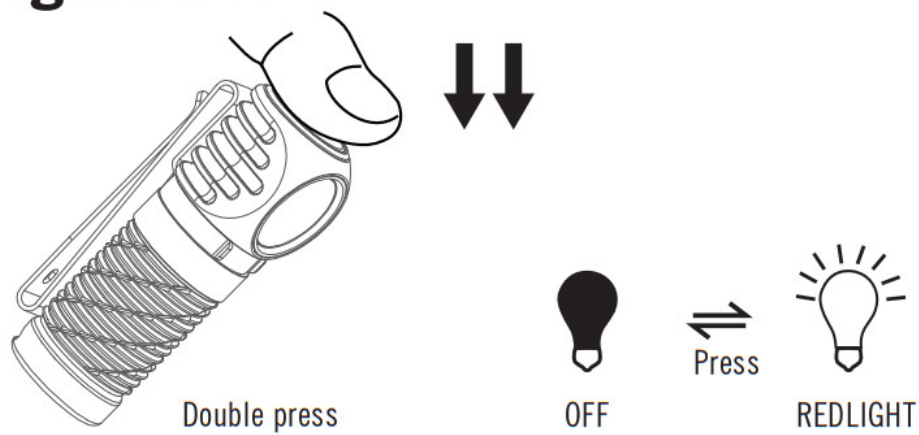


Figure 8-2


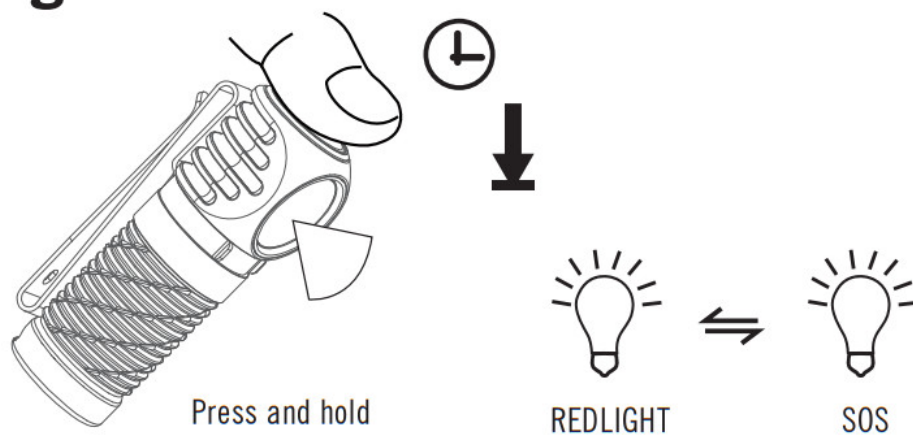


Figure 9

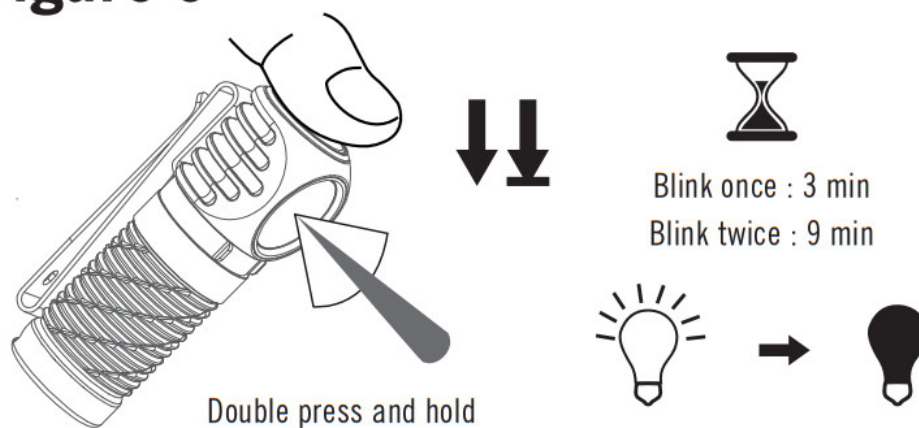

2.10 Battery Indicator: Normal mode, see Figure 10-1;
Moonlight mode, see Figure 10-2;
2.11 The installation of the headband, see Figure 11;

Figure 10-1

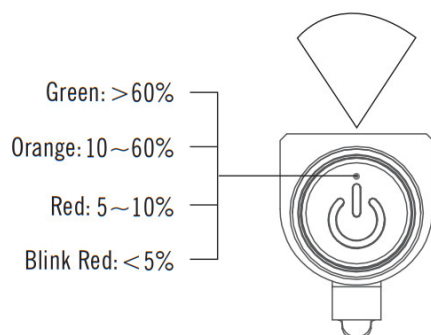


Figure 10-2






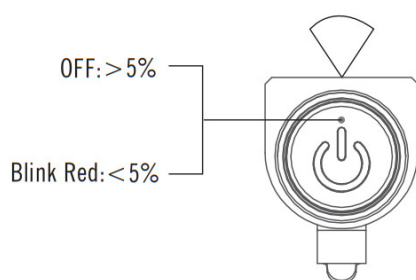


Figure 11

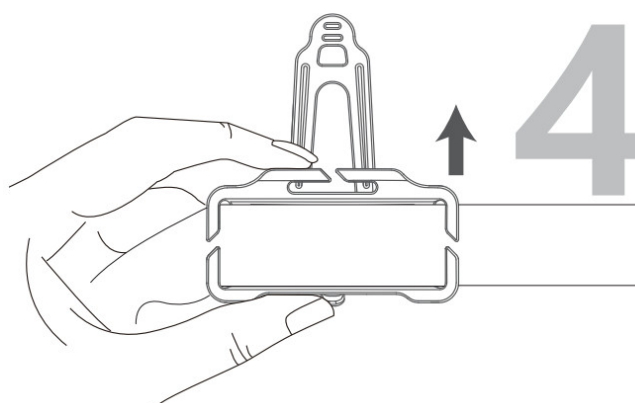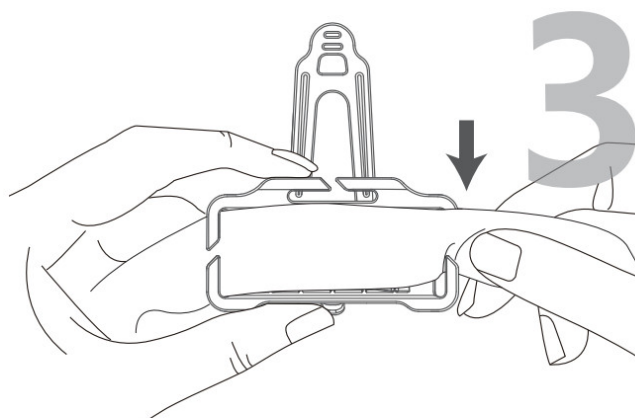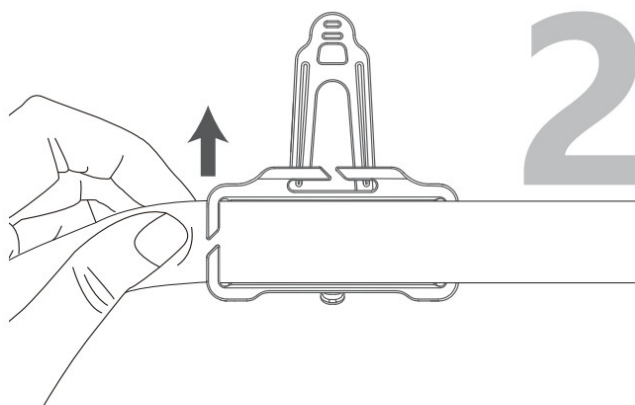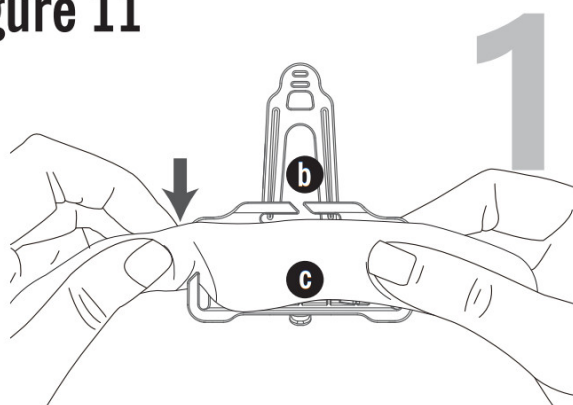


2.12 The usage of the headlamp base, see Figure 12.


Figure 12

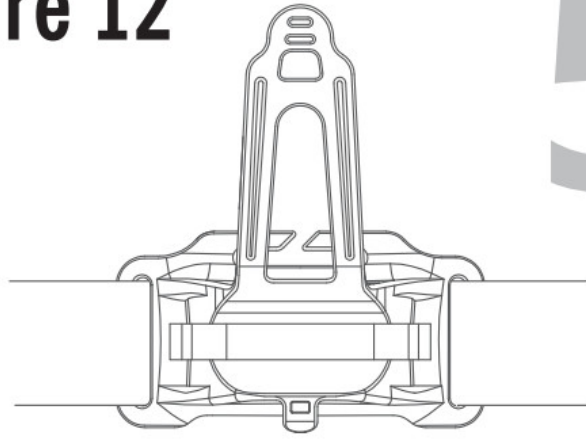

5

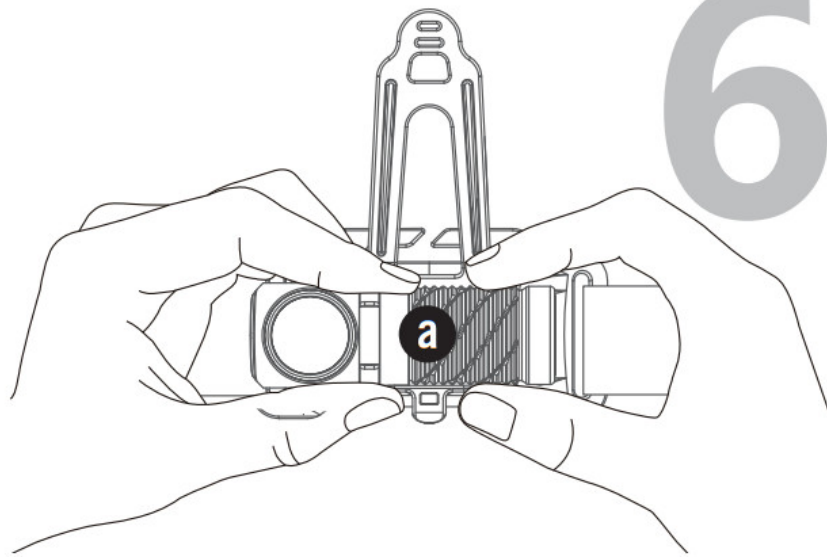

6

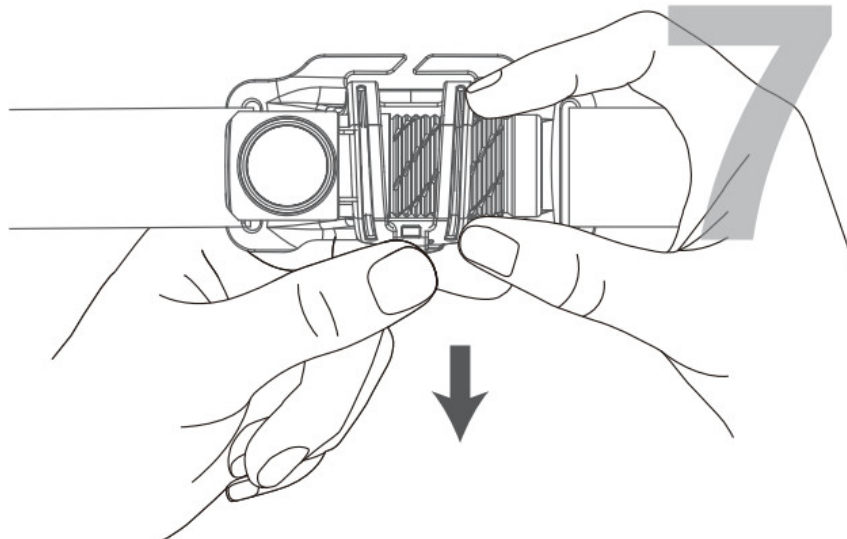

7

WARRANTY

Within 30 days of purchase: Contact the original seller for repair or replacement.

Within 5 years of purchase: Contact Olight for repair or replacement.

Battery warranty: Olight offers a one-year warranty for all rechargeable batteries.

MCC magnetic USB charging cable: One year.

For any of the fragile or low-value fittings not covered above, like lanyards and clips, you can contact the post-sale within 30 days of the purchase, if it has any quality drawback or damage under normal use conditions. If such

drawback or damage occurs after 30 days of the purchase or under abnormal use conditions, we will only offer conditional quality assurance as appropriate.

USA Customer Support

cs@olightstore.com

Global Customer Support

customer-service@olightworld.com

Visit www.olightworld.com to see our complete product line of portable illumination tools.



Dongguan Olight E-Commerce Technology Co., Ltd
4th Floor, Building 4, Kegu Industrial Park, No 6 Zhongnan Road, Changan Town,
Dongguan City, Guangdong, China.

Made in China



3.4000.0529

B. 12, 06, 2022

Documents / Resources



[OLIGHT Perun 2 Mini Flashlight](#) [pdf] User Manual
Perun 2 Mini Flashlight, Perun 2, Mini Flashlight, Flashlight, Light

References

- Olightworld.com. [Olight Flashlights](#), [Tactical Light](#), [Outdoor Light](#), [Weapon Light](#)